




# Product Specifications



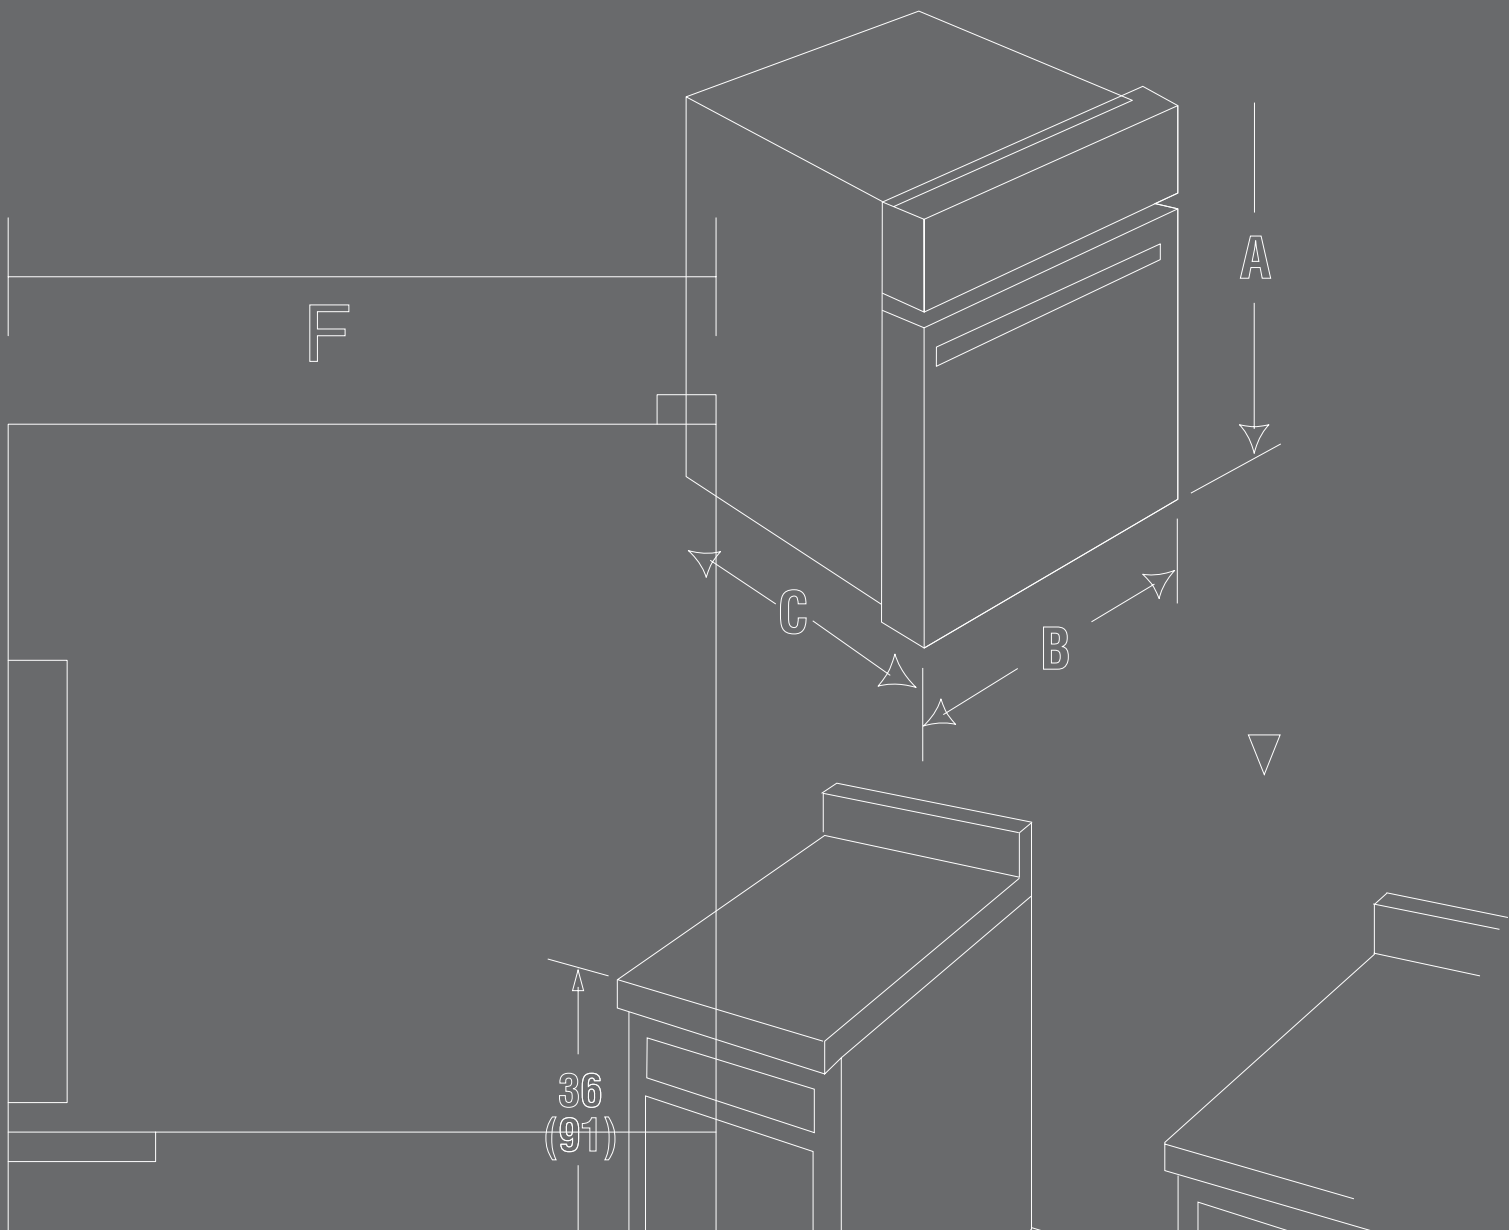

WARRANTY INFORMATION


Parts And Labor




For one (1) year from the original retail purchase date, any part that fails in normal home use will be repaired or replaced free of charge.

If You Need Service

See the Troubleshooting section in your Use and Care Guide, call the dealer from whom your appliance was purchased, or call Maytag Services LLC Customer Assistance at 1-800-688-9900 (U.S.A.) or 1-800-688-2002 (Canada) to locate an authorized servicer.

AMANA® SIDE-BY-SIDE 23 CU. FT. REFRIGERATOR

MODEL	ASD2325KE
<b>Colors</b>	
White	•
Bisque	•
Black	•
Stainless Steel Door With Stainless Handles	•
ENERGY STAR®-Qualified 	•
<b>Fresh Food Interior</b>	
Lights	3
Temp-Assure® Freshness Design	•
PuriClean® II Retractable Water/Ice Filter	750-Gallon
Temperature-Controlled Beverage Chiller™ Compartment	•
Adjustable Spillsaver™ Glass Shelves	3
Snack Drawer	•
Humidity-Controlled Garden Fresh™ Sealed Crisper Drawers	1
Spillsaver™ Crisper Top	•
Temperature-Controlled Deli Drawer	•
Dairy Center	•
Adjustable Fresh Food Gallon Door Buckets	3
<b>Freezer Interior</b>	
Lights	3
Wire Shelves	3
Slide-Out Freezer Baskets	1 - Wire
Removable Door Buckets	4
<b>Dispenser</b>	
Electronic FrontFill™ Dispenser	Five-Button
Auto Night Light	•
Control Lockout	•
Filter Status Indicator	•
<b>General Features</b>	
SoftSound™ Quiet Package	•
<b>Capacities And Unit Dimensions</b>	
Kitchen Cabinet Opening — in. (cm)	33 (83.8)
Top/Back Air Clearance — in. (cm)	½ (1.3) ⅝ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	22.6 (0.64)
Fresh Food Capacity — cu. ft. (cu. m)	14.8 (0.42)
Frozen Food Capacity — cu. ft. (cu. m)	7.9 (0.22)
A — Cabinet Height With Hinge Cover — in. (cm)	68¾ (175.2)
B — Cabinet Height Without Hinge — in. (cm)	66¾ (169.9)
C — Cabinet Depth With Door Handle — in. (cm)	33¼ (84.5)
D — Cabinet Depth Without Door — in. (cm)	28 (71.1)
E — Cabinet Depth Without Door Handle — in. (cm)	30¾ (78.1)
F — Cabinet Width — in. (cm)	32¾ (82.9)
G — Depth With Door @ 90° — in. (cm)	49 (124.5)
H — Water Line Location From Right Side Facing Back Of Unit — in. (cm)	29 (73.7)
I — Water Line Location From Bottom — in. (cm)	6 (15.2)
J — Power Cord Location From Right Side Facing Back Of Unit — in. (cm)	16 (40.6)
K — Power Cord Location From Bottom — in. (cm)	9 (22.9)
L — Side Wall Clearance For 90° Door Opening — in. (cm)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	300 (136.1)

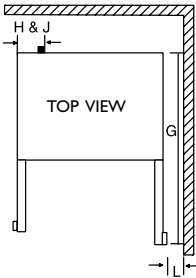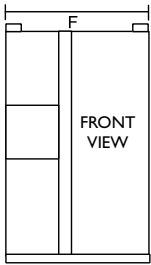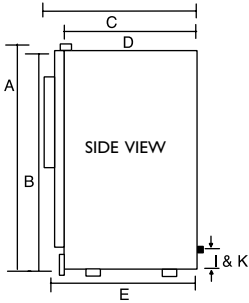


All models listed may not be available from every Amana dealer.

Amana’s ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® SIDE-BY-SIDE 26 CU. FT. REFRIGERATORS

MODELS	ASD2620HR	ASD2625KE	ASD2627KE	NON-DISPENSER ASB2623HR
<b>Colors</b>				
White	•	•	•	•
Bisque		•		•
Black	•	•	•	
Stainless Steel Door With Stainless Handles		•	•	
Silver Metallic	•			
ENERGY STAR®-Qualified 		•	•	
<b>Fresh Food Interior</b>				
Lights	2	3	3	3
Temp-Assure® Freshness Design	•	•	Electronic	•
PuriClean® II Retractable Water/Ice Filter	750-Gallon	750-Gallon	750-Gallon	
Temperature-Controlled Beverage Chiller™ Compartment		•		•
Adjustable Spillsaver™ Glass Shelves	3	3	3	3
Slide-Out Shelves			•	
Snack Drawer		•		
Humidity-Controlled Garden Fresh™ Sealed Crisper Drawers		1	2 (With RollerGlide™ Track)	2 (With RollerGlide™ Track)
Spillsaver™ Crisper Top		•	•	
Temperature-Controlled Deli Drawer		•	•	•
Dairy Center	•	•	•	•
Adjustable Fresh Food Gallon Door Buckets	4	3	1 (Clear)	2 (Clear)
Tilt-Out Fresh Food Door Bin — 2 Liter			•	•
Tall-Bottle Retainer			•	
Bucket Grip Pads			•	
Beverage Organizer™ Rack				•
Can Pack Keeper			•	
<b>Freezer Interior</b>				
Lights	1	3	3	2
Wire Shelves	3	3	3	3
Slide-Out Freezer Baskets	1 - Opaque	1 - Wire	1 - Wire	2 - Wire
Removable Door Buckets	4	4	4	2
Tilt-Out Door Bins				3
<b>Dispenser</b>				
Electronic FrontFill™ Dispenser	Three-Button	Five-Button	Five-Button	
Auto Night Light		•	•	
Control Lockout		•	•	
Filter Status Indicator		•	•	
<b>General Features</b>				
SoftSound™ Quiet Package	•	•	•	•
EasyView™ Lighting Package			•	
<b>Capacities And Unit Dimensions</b>				
Kitchen Cabinet Opening — in. (cm)	36 (91.4)	36 (91.4)	36 (91.4)	36 (91.4)
Top/Back Air Clearance — in. (cm)	½ (1.3)/½ (1.3)	½ (1.3)/½ (1.3)	½ (1.3)/½ (1.3)	½ (1.3)/½ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	25.6 (0.72)	25.6 (0.72)	25.6 (0.72)	25.4 (0.72)
Fresh Food Capacity — cu. ft. (cu. m)	15.8 (0.45)	15.8 (0.45)	15.8 (0.45)	15.8 (0.45)
Frozen Food Capacity — cu. ft. (cu. m)	9.8 (0.28)	9.8 (0.28)	9.8 (0.28)	9.6 (0.27)
A — Cabinet Height With Hinge Cover — in. (cm)	70 (179.4)	70 (179.4)	70 (179.4)	70 (179.4)
B — Cabinet Height Without Hinge — in. (cm)	68½ (174)	68½ (174)	68½ (174)	68½ (174)
C — Cabinet Depth With Door Handle — in. (cm)	33¾ (84.5)	33¾ (84.5)	33¾ (84.5)	33¾ (84.5)
D — Cabinet Depth Without Door — in. (cm)	28 (71.1)	28 (71.1)	28 (71.1)	28 (71.1)
E — Cabinet Depth Without Door Handle — in. (cm)	30¾ (78.1)	30¾ (78.1)	30¾ (78.1)	30¾ (78.1)
F — Cabinet Width — in. (cm)	35¾ (90.5)	35¾ (90.5)	35¾ (90.5)	35¾ (90.5)
G — Depth With Door @ 90° — in. (cm)	49¾ (126.6)	49¾ (126.6)	49¾ (126.6)	49¾ (126.6)
H — Water Line Location From Right Side Facing Back Of Unit — in. (cm)	29¾ (74.9)	29¾ (74.9)	29¾ (74.9)	29¾ (74.9)
I — Water Line Location From Bottom — in. (cm)	7 (17.8)	7 (17.8)	7 (17.8)	7 (17.8)
J — Power Cord Location From Right Side Facing Back Of Unit — in. (cm)	15½ (39.4)	15½ (39.4)	15½ (39.4)	15½ (39.4)
K — Power Cord Location From Bottom — in. (cm)	9¾ (24.1)	9¾ (24.1)	9¾ (24.1)	9¾ (24.1)
L — Side Wall Clearance For 90° Door Opening — in. (cm)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	343 (155.6)	343 (155.6)	343 (155.6)	343 (155.6)



AMANA® SIDE-BY-SIDE CABINET-DEPTH REFRIGERATORS




MODELS	ACD2232HR	ACD2234HR	ACD2238HTS
<b>Colors</b>			
White	•	•	
Bisque	•	•	
Black	•	•	
Stainless Steel	Black Handles	ACD2234KR	Stainless Steel Panels
<b>Fresh Food Interior</b>			
Lights	3	3	3
Temp-Assure® Freshness Design	•	•	•
PuriClean® II Retractable Water/Ice Filter	750-Gallon	750-Gallon	750-Gallon
Temperature-Controlled Beverage Chiller™ Compartment		•	•
Temperature-Controlled MiniChiller™ Compartment		•	•
Adjustable Spillsaver™ Glass Shelves	3	3	3
Framed Humidity-Controlled Garden Fresh™ Crisper Drawers With RollerGlide™ Tracks	2	2	2
Spillsaver™ Crisper Top	•	•	•
Framed Temperature-Controlled Deli Drawer With RollerGlide™ Track	•	•	•
Dairy Center	•	•	•
Adjustable Clear Door Buckets	4	2	2
<b>Freezer Interior</b>			
Lights	3	3	3
Wire Shelves	2	2	2
Slide-Out Freezer Baskets	2	2	2
Removable Door Bucket	4	1	1
Tilt-Out Door Bins		3	3
<b>Dispenser</b>			
Electronic FrontFill™ Dispenser	Three-Button	Five-Button	Five-Button
Auto Night Light		•	•
Control Lockout		•	•
Filter Status Indicator		•	•
<b>General Features</b>			
SoftSound™ Quiet Package	•	•	•
<b>Capacities And Unit Dimensions</b>			
Kitchen Cabinet Opening — in. (cm)	36 (91.4)	36 (91.4)	36 (91.4)
Top/Back Clearance — in. (cm)	½ (1.3)/½ (1.3)	½ (1.3)/½ (1.3)	½ (1.3)/½ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	21.6 (0.61)	21.6 (0.61)	21.6 (0.61)
Fresh Food Capacity — cu. ft. (cu. m)	13.5 (0.38)	13.5 (0.38)	13.5 (0.38)
Frozen Food Capacity — cu. ft. (cu. m)	8.1 (0.23)	8.1 (0.23)	8.1 (0.23)
A — Cabinet Height With Hinge Cover — in. (cm)	70 (179.4)	70 (179.4)	70 (179.4)*
B — Cabinet Height Without Hinge — in. (cm)	68½ (174)	68½ (174)	68½ (174)
C — Cabinet Depth With Door Handle — in. (cm)	29¾ (74.3)	29¾ (74.3)	28½ (72.4)
D — Cabinet Depth Without Door — in. (cm)	24 (60.9)	24 (60.9)	24 (60.9)
E — Cabinet Depth Without Door Handle — in. (cm)	26¾ (67.9)	26¾ (67.9)	27¾ (68.9)
F — Cabinet Width — in. (cm)	35¾ (90.5)	35¾ (90.5)	35¾ (90.5)
G — Depth With Door @ 90° — in. (cm)	45¾ (116.4)	45¾ (116.4)	45¾ (116.4)
H — Water Line Location From Right Side Facing Back Of Unit — in. (cm)	29¾ (74.9)	29¾ (74.9)	29¾ (74.9)
I — Water Line Location From Bottom — in. (cm)	7 (17.8)	7 (17.8)	7 (17.8)
J — Power Cord Location From Right Side Facing Back Of Unit — in. (cm)	15½ (39.4)	15½ (39.4)	15½ (39.4)
K — Power Cord Location From Bottom — in. (cm)	9¾ (24.1)	9¾ (24.1)	9¾ (24.1)
L — Side Wall Clearance For 90° Door Opening — in. (cm)	3 (7.6)	3 (7.6)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	300 (136.1)	300 (136.1)	300 (136.1)

\*The height of the door to the top of the trim for ACD2238HTS is 70¼" (178.1 cm).

Replacing the stainless steel panels on ACD2238HTS with custom panels results in the following measurements:


	Panel Height	Panel Width	Weight Limitations:
Fresh Food Door — in. (cm)	66¾ (169.5)	18½% (48.1)	Fresh food panel should not weigh more than 30 lbs. (14 kg). Freezer panels should not weigh more than 15 lbs. (7 kg) each.
Ice And Water Upper Freezer Door — in. (cm)	18½ (46.0)	13½% (35.4)	
Ice And Water Lower Freezer Door — in. (cm)	32½ (81.5)	13½% (35.4)	




All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.





AMANA® EASY REACH™ REFRIGERATORS

MODELS	ABB192IDE	ABB222IFE
<b>Colors</b>		
White	•	•
Bisque		
Black		•
Silver Metallic		•
ENERGY STAR®-Qualified 	•	•
<b>Fresh Food Interior</b>		
Covered Lights	2	2
Temp-Assure® Freshness Design	•	•
Adjustable Glass Shelves	3	3
Clear Deli Drawer	•	•
Clear Humidity-Controlled Garden Fresh™ Crisper Drawers	2	2
Dairy Center	•	•
Gallon Door Storage	•	•
Adjustable Door Buckets	4	4
<b>Freezer Interior</b>		
Covered Light	1	1
Wire Shelf	•	•
Plastic Door Bin	•	•
Glide-Out Wire Basket	•	•
Ice Cube Trays And Ice Bucket	•	•
Optional Icemaker	IC1B	IC1B
<b>General Features</b>		
SofSound™ Quiet Package	•	•
EasyView™ Lighting Package	•	•
Consumer-Reversible Door Swing*	•	•




<b>Capacities And Unit Dimensions</b>		
Kitchen Cabinet Opening — in. (cm)	30 (76.2)	33 (83.8)
Top/Back Air Clearance — in. (cm)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	18.5 (0.52)	21.9 (0.62)
Fresh Food Capacity — cu. ft. (cu. m)	12.9 (0.37)	15.6 (0.44)
Frozen Food Capacity — cu. ft. (cu. m)	5.6 (0.15)	6.3 (0.18)
A — Cabinet Height With Hinge Cover — in. (cm)	66½ (169.5)	69½ (177.2)
B — Cabinet Height Without Hinge — in. (cm)	65½ (166.4)	68½ (174)
C — Cabinet Depth With Door Handle — in. (cm)	33¼ (84.3)	33¼ (84.3)
D — Cabinet Depth Without Door — in. (cm)	28½ (71.4)	28½ (71.4)
E — Cabinet Depth Without Door Handle — in. (cm)	30¼ (78.3)	30¼ (78.3)
F — Cabinet Width — in. (cm)	29¼ (75.2)	32¼ (82.9)
G — Depth With Door @ 90° — in. (cm)	59 (149.9)	62 (157.6)
H — Water Line Location From Left Side Facing Back Of Unit — in. (cm)	2 (5.1)	2 (5.1)
I — Water Line Location From Bottom — in. (cm)	6 (15.2)	6 (15.2)
J — Power Cord Location From Left Side Facing Back Of Unit — in. (cm)	14¼ (36.2)	14¼ (36.2)
K — Power Cord Location From Bottom — in. (cm)	9¼ (23.5)	9¼ (23.5)
L — Side Wall Clearance For 90° Door Opening — in. (cm)	3 (7.6)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	259 (117.5)	292 (132.4)

\*Except Silver Metallic.

All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.




AMANA® EASY REACH™ PLUS REFRIGERATORS

MODELS	ABB1922FE	ABB1927DE	ABB2222FE	ABB2227DE	ABB2522FE	ABB2527DE
<b>Colors</b>						
White	•	•	•	•	•	•
Bisque	•		•		•	
Black	•	•	•	•	•	•
Stainless Steel Door With Stainless Handles	ABR/L1922FES	ABR/L1927FES	ABR/L2222FES	ABR/L2227FES	ABR/L2522FES	ABR/L2527FES
ENERGY STAR®-Qualified 	•	•	•	•	•	•
<b>Fresh Food Interior</b>						
Covered Lights	2	2	2	2	2	2
Electronic Temp-Assure® Freshness Design	•	•	•	•	•	•
Adjustable Glass Shelves	4		4		4	
Adjustable Spillsaver™ Glass Shelves		4		4		4
EasyGlide™ Shelves		2		2		2
Clear Deli Drawer	•		•		•	
Temperature-Controlled Chef's Pantry™ Drawer With Bottle Caddy		With Divider		With Divider		With Divider
Humidity-Controlled Garden Fresh™ Crisper Drawers	2	2 (Framed)	2	2 (Framed)	2	2 (Framed)
Beverage Organizer™ Rack		•		•		•
Dairy Center	•	•	•	•	•	•
Gallon Door Storage	•	•	•	•	•	•
Adjustable Door Buckets	4	5 (Clear)	4	5 (Clear)	4	5 (Clear)
Bucket Grip Pads		•		•		•
FreshNest™ Covered Egg Storage	•	•	•	•	•	•
<b>Freezer Interior</b>						
Covered Light	•	•	•	•	•	•
EasyFreezer™ Pull-Out Drawer With EasyClose™ Drawer Track System*	•	•	•	•	•	•
Slide-Out Upper Basket	•	•	•	•	•	•
Glide-Out Lower Basket With QuickSplit™ Organizer	•	•	•	•	•	•
Ice Cube Trays And Ice Bucket	•	•	•	•	•	•
Ice Service Rack		•		•		•
Optional Icemaker And Ice Bucket*	IC11B	IC11B	IC11B	IC11B	IC11B	IC11B
<b>General Features</b>						
SofSound™ Quiet Package	•	•	•	•	•	•
EasyView™ Lighting Package	•	•	•	•	•	•
Consumer-Reversible Door Swing*	•	•	•	•	•	•

<b>Capacities And Unit Dimensions</b>						
Kitchen Cabinet Opening — in. (cm)	30 (76.2)	30 (76.2)	33 (83.8)	33 (83.8)	36 (91.4)	36 (91.4)
Top/Back Air Clearance — in. (cm)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	18.5 (0.52)	18.5 (0.52)	21.9 (0.62)	21.9 (0.62)	21.9 (0.62)	25.1 (0.71)
Fresh Food Capacity — cu. ft. (cu. m)	12.9 (0.37)	12.9 (0.37)	15.6 (0.44)	15.6 (0.44)	17.8 (0.50)	17.8 (0.50)
Frozen Food Capacity — cu. ft. (cu. m)	5.6 (0.16)	5.6 (0.16)	6.3 (0.18)	6.3 (0.18)	7.3 (0.21)	7.3 (0.21)
A — Cabinet Height With Hinge Cover — in. (cm)	66½ (169.5)	66½ (169.9)	69½ (177.5)	69½ (177.5)	68½ (174.0)	69¼ (177.1)
B — Cabinet Height Without Hinge — in. (cm)	65½ (166.4)	65½ (166.7)	68½ (174.3)	68½ (174.3)	68½ (174.3)	68½ (174.0)
C — Cabinet Depth With Door Handle — in. (cm)	33¼ (84.3)	33¼ (84.3)	33¼ (84.3)	33¼ (84.3)	33 (83.8)	33 (83.8)
D — Cabinet Depth Without Door — in. (cm)	28½ (71.3)	28 (71.1)	28 (71.1)	28 (71.1)	29 (73.7)	29 (73.7)
E — Cabinet Depth Without Door Handle — in. (cm)	30¼ (78.3)	30¼ (78.3)	30¼ (78.3)	30¼ (78.3)	31¼ (80.7)	31¼ (80.7)
F — Cabinet Width — in. (cm)	29¼ (75.2)	29¼ (75.2)	32¼ (82.9)	32¼ (82.9)	35¼ (90.5)	35¼ (90.5)
G — Depth With Door @ 90° — in. (cm)	59 (149.9)	59 (149.9)	62¼ (173)	62¼ (173)	62 (157.6)	62 (157.6)
H — Water Line Location From Left Side Facing Back Of Unit — in. (cm)	2 (5.1)	2 (5.1)	2 (5.1)	2 (5.1)	5 (12.7)	5 (12.7)
I — Water Line Location From Bottom — in. (cm)	6 (15.2)	6 (15.2)	6 (15.2)	6 (15.2)	6 (15.2)	6 (15.2)
J — Power Cord Location From Left Side Facing Back Of Unit — in. (cm)	14¼ (36.2)	14¼ (36.2)	14¼ (36.2)	14¼ (36.2)	17¼ (43.8)	17¼ (43.8)
K — Power Cord Location From Bottom — in. (cm)	9¼ (23.5)	9¼ (23.5)	9¼ (23.5)	9¼ (23.5)	9¼ (23.5)	9¼ (23.5)
L — Side Wall Clearance For 90° Door Opening — in. (cm)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	259 (117.5)	273 (123.8)	292 (132.4)	313 (141.9)	350 (158.8)	350 (158.8)

\*Except Stainless Steel.

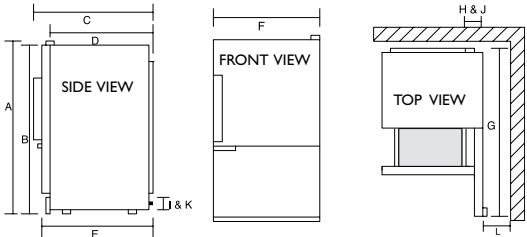

All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® EASY REACH™ PLUS REFRIGERATORS (CONTINUED)

MODELS	ABD2233DE	ABD2533DE	CABINET-DEPTH ABC2037DE	CABINET-DEPTH ABC2037DT	CABINET-DEPTH ABC2037DP
Style	Freestanding	Freestanding	Freestanding	Built-In Look With Trim And Full-Length Handles	Built-In Look With Trim And Full-Length Handles
<b>Colors</b>					
White	•	•	•		
Bisque					
Black	•	•	•	•	
Stainless Steel Door With Stainless Handles	•	•	•	Color-Coordinated	Full-Length
Door Panels			•	Requires Custom Panels	Stainless Steel — Factory-Installed
ENERGY STAR®-Qualified	•	•	•	•	•
<b>Fresh Food Interior</b>					
Covered Lights	2	2	2	2	2
EasyFill™ Internal Water Dispenser	•	•	•	•	•
PuriClean® II Retractable Water/Ice Filter	•	•	•	•	•
Electronic Temp-Assure® Freshness Design	•	•	•	•	•
Adjustable Spillsaver™ Glass Shelves (Total)	4 Half-Width	4 Half-Width	4 Half-Width	4 Half-Width	4 Half-Width
EasyGlide™ Shelves*	2	4	4	4	4
Temperature-Controlled Beverage Chiller™ Compartment	•	•	•	•	•
Temperature-Controlled Chef's Pantry™ Drawer With Bottle Caddy	With Divider	With Divider	With Divider	With Divider	With Divider
Humidity-Controlled Garden Fresh™ Sealed Crisper Drawers With Frames	2	2	2	2	2
Dairy Center	•	•	•	•	•
Gallon Door Storage	•	•	•	•	•
Clear Adjustable Door Buckets	4	4	3	3	3
Bucket Grip Pads	•	•	•	•	•
FreshNest™ Covered Egg Storage	•	•	•	•	•
<b>Freezer Interior</b>					
Covered Light	•	•	•	•	•
EasyFreezer™ Pull-Out Drawer With EasyClose™ Drawer Track System*	•	•	•	•	•
Slide-Out Upper Basket	•	•	•	•	•
Glide-Out Lower Basket With QuickSplit™ Organizer	•	•	•	•	•
Icemaker And Ice Bucket	Factory-Installed	Factory-Installed	Factory-Installed	Factory-Installed	Factory-Installed
<b>General Features</b>					
EasyView™ Lighting Package	•	•	•	•	•
SoftSound™ Quiet Package	•	•	•	•	•
Consumer-Reversible Door Swing	•*	•*	•	•	•
<b>Capacities And Unit Dimensions</b>					
Kitchen Cabinet Opening — in. (cm)	33 (83.8)	36 (91.4)	36 (91.4)	36 (91.4)	36 (91.4)
Top/Back Air Clearance — in. (cm)	⅜ (1.3)/⅜ (1.3)	⅜ (1.3)/⅜ (1.3)	⅜ (1.3)/⅜ (1.3)	⅜ (1.3)/⅜ (1.3)	⅜ (1.3)/⅜ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	21.9 (0.62)	25.1 (0.71)	20.3 (0.57)	20.3 (0.57)	20.3 (0.57)
Fresh Food Capacity — cu. ft. (cu. m)	15.6 (0.44)	17.77 (0.51)	14.62 (0.41)	14.62 (0.41)	14.62 (0.41)
Frozen Food Capacity — cu. ft. (cu. m)	6.3 (0.18)	7.29 (0.21)	5.66 (0.16)	5.66 (0.16)	5.66 (0.16)
A — Cabinet Height With Hinge Cover — in. (cm)	69⅞ (177.5)	69⅞ (177.5)	70⅞ (178.1)	70⅞ (178.1)	70⅞ (178.1)**
B — Cabinet Height Without Hinge — in. (cm)	68⅞ (174.3)	68⅞ (174.3)	68⅞ (174)	68⅞ (174)	68⅞ (174)
C — Cabinet Depth With Door Handle — in. (cm)	33 (83.8)	34 (86.4)	29 (73.7)	28 (71.1)	28 (71.1)
D — Cabinet Depth Without Door — in. (cm)	28⅞ (71.3)	29 (73.7)	24 (60.9)	24 (60.9)	24 (60.9)
E — Cabinet Depth Without Door Handle — in. (cm)	30⅞ (78.3)	31⅞ (80.6)	27⅞ (68.9)	27⅞ (68.9)	27⅞ (68.9)
F — Cabinet Width — in. (cm)	33⅞ (84.6)	35⅞ (90.5)	35⅞ (90.5)	35⅞ (90.5)	35⅞ (90.5)
G — Depth With Door @ 90° — in. (cm)	62 (157.6)	66⅞ (168)	61⅞ (155.6)	61⅞ (155.6)	61⅞ (155.6)
H — Water Line Location From Left Side Facing Back Of Unit — in. (cm)	2 (5.1)	5 (12.7)	8 (20.3)	8 (20.3)	8 (20.3)
I — Water Line Location From Bottom — in. (cm)	6 (15.2)	6 (15.2)	6 (15.2)	6 (15.2)	6 (15.2)
J — Power Cord Location From Left Side Facing Back Of Unit — in. (cm)	14⅞ (36.2)	17⅞ (43.8)	20⅞ (51.4)	20⅞ (51.4)	20⅞ (51.4)
K — Power Cord Location From Bottom — in. (cm)	9⅞ (23.5)	9⅞ (23.5)	9⅞ (23.5)	9⅞ (23.5)	9⅞ (23.5)
L — Side Wall Clearance For 90° Door Opening — in. (cm)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	313 (141.9)	350 (158.8)	327 (148.3)	327 (148.3)	327 (148.3)

\* Except Stainless Steel.  
\*\* The height of the door to the top of the trim for ABC2037DP is 36⅞" (92.7 cm).

Replacing the panels on ABC2037DT with custom panels results in the following measurements:


	Panel Height	Panel Width	Weight Limitations:
Refrigerator Door — in. (cm)	42 (106.7)	35⅞ (90.5)	Refrigerator door panel should not weigh more than 30 lbs. (14 kg). Freezer drawer panel should not weigh more than 15 lbs. (7 kg).
Freezer Drawer — in. (cm)	23⅞ (59.1)	36⅞ (91.6)	

All models listed may not be available from every Amana dealer. Amana's ongoing commitment to quality products may mean a change in product specifications without notice.

AMANA® FRENCH DOOR REFRIGERATORS

MODELS	FRENCH DOOR AFC2033DR	FRENCH DOOR AFB2534DE	FRENCH DOOR AFD2535DE	FRENCH DOOR AFI2538AE
<b>Colors</b>				
White	•	•	•	•
Bisque	•		•	•
Black	•	•	•	•
Stainless Steel Door With Stainless Handles		•	•	•
ENERGY STAR®-Qualified		•	•	•
<b>Fresh Food Interior</b>				
Covered Lights	2	2	2	3
EasyFill™ Internal Water Dispenser			•	
PuriClean® II Retractable Water/Ice Filter			•	•
FastGrab™ Organizer				•
Electronic Temp-Assure® Freshness Design	•	•	•	•
Adjustable Spillsaver™ Glass Shelves (Total)	4 Half-Width	4 Half-Width	4 Half-Width	3 Half-Width
EasyGlide™ Shelves	4	2	2	3
Spillsaver™ Glass Mini Shelf				•
Temperature-Controlled Chef's Pantry™ Drawer	With Divider	With Divider	With Divider	With Divider
Bottle Caddy		•	•	•
Humidity-Controlled Garden Fresh™ Sealed Crisper Drawers With Frames	2	2	2	2
Dairy Center	•	•	•	•
Gallon Door Storage	•	•	•	•
Clear Adjustable Door Buckets	5	5	5	1
Bucket Grip Pads		•	•	•
FreshNest™ Covered Egg Storage	•	•	•	•
<b>Freezer Interior</b>				
Covered Light	•	•	•	•
EasyFreezer™ Pull-Out Drawer With EasyClose™ Drawer Track System	•	•	•	•
Slide-Out Upper Basket	•	•	•	•
Glide-Out Lower Basket With Adjustable QuickSplit™ Organizer	•	•	•	Permanent
Icemaker And Ice Bucket	Factory-Installed		Factory-Installed	Factory-Installed
<b>Dispenser</b>				
External FrontFill™ Water And Cubed Ice Dispenser				•
Auto Night Light				•
Control Lockout				•
Filter Status Indicator				•
Temperature Readout				•
Max Cool Setting				•
Door Open Alarm				•
<b>General Features</b>				
EasyView™ Lighting Package	•	•	•	•
SoftSound™ Quiet Package	•	•	•	•
<b>Capacities And Unit Dimensions</b>				
Kitchen Cabinet Opening — in. (cm)	36 (91.4)	36 (91.4)	36 (91.4)	36 (91.4)
Top/Back Air Clearance — in. (cm)	⅜ (1.3)/⅜ (1.3)	⅜ (1.3)/⅜ (1.3)	⅜ (1.3)/⅜ (1.3)	⅜ (1.3)/⅜ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	19.8 (0.56)	24.8 (0.70)	24.8 (0.70)	24.9 (0.70)
Fresh Food Capacity — cu. ft. (cu. m)	14.1 (0.40)	17.5 (0.50)	17.5 (0.50)	18.3 (0.52)
Frozen Food Capacity — cu. ft. (cu. m)	5.5 (0.15)	7.29 (0.21)	7.29 (0.21)	6.61 (0.19)
A — Cabinet Height With Hinge Cover — in. (cm)	69⅞ (177.5)	69⅞ (177.5)	69⅞ (177.5)	70⅞ (178.1)
B — Cabinet Height Without Hinge — in. (cm)	68⅞ (174.3)	68⅞ (174)	68⅞ (174)	68⅞ (174.3)
C — Cabinet Depth With Door Handle — in. (cm)	29⅞ (75.3)	34 (86.4)	34 (86.4)	35⅞ (89.5)
D — Cabinet Depth Without Door — in. (cm)	24 (60.9)	29 (73.7)	29 (73.7)	29 (73.7)
E — Cabinet Depth Without Door Handle — in. (cm)	26⅞ (67.9)	31⅞ (80.6)	31⅞ (80.6)	32⅞ (83.4)
F — Cabinet Width — in. (cm)	35⅞ (90.5)	35⅞ (90.5)	35⅞ (90.5)	35⅞ (90.5)
G — Depth With Door @ 90° — in. (cm)	61⅞ (155.6)	48⅞ (122.5)	48⅞ (122.5)	48 (121.9)
H — Water Line Location From Left Side Facing Back Of Unit — in. (cm)	8 (20.3)	5 (12.7)	5 (12.7)	8 (20.3)
I — Water Line Location From Bottom — in. (cm)	6 (15.2)	6 (15.2)	6 (15.2)	8 (20.3)
J — Power Cord Location From Left Side Facing Back Of Unit — in. (cm)	20⅞ (51.4)	17⅞ (43.8)	17⅞ (43.8)	20 (50.8)
K — Power Cord Location From Bottom — in. (cm)	9⅞ (23.5)	9⅞ (23.5)	9⅞ (23.5)	9⅞ (24.1)
L — Side Wall Clearance For 90° Door Opening — in. (cm)	3 (7.6)	3 (7.6)	3 (7.6)	3⅞ (8.3)
Approximate Shipping Weight — lbs. (kg)	300 (136.1)	350 (158.8)	350 (158.8)	375 (170.1)




All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



FRONT VIEW



TOP VIEW








AMANA® 15 AND 18 CU. FT. TOP-FREEZER REFRIGERATORS

MODELS	ATB1504AR	ATB1832AR	ATB1836AR	ATF1836AR
Colors				
White	•	•	•	•
Bisque		•		•
Black	•		•	•
Stainless Steel	•		•	•
Silver Metallic		•		
Fresh Food Interior				
Light	•	•	•	•
Central Cool™ System		•	•	•
Adjustable Spillsaver™ Glass Shelves			•	•
Glass Crisper Shelf	•	•	•	•
Humidity-Controlled Garden Fresh™ Crisper Drawers	2	2	2	2
Dairy Center	•	•	•	•
Fixed Gallon Door Shelves	2	2		
Fixed Door Buckets	1	1	1	1
Adjustable Gallon Door Buckets			4	4
Freezer Interior				
Covered Light			•	•
Wire Shelf	•	•	•	•
Optional Icemaker And Ice Bucket	UKI1500AXX	UKI1500AXX	UKI1500AXX	Factory-Installed
FlexAction Ice Cube Trays	2	2	2	
Capacities And Unit Dimensions				
Kitchen Cabinet Opening — in. (cm)	28 (71.1)	30 (76.2)	30 (76.2)	30 (76.2)
Top/Back Air Clearance — in. (cm)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	14.99 (0.42)	18.1 (0.51)	18.1 (0.51)	18.1 (0.51)
Fresh Food Capacity — cu. ft. (cu. m)	10.75 (0.30)	13 (0.37)	13 (0.37)	13 (0.37)
Frozen Food Capacity — cu. ft. (cu. m)	4.24 (0.12)	5.1 (0.14)	5.1 (0.14)	5.1 (0.14)
A — Cabinet Height With Hinge Cover — in. (cm)	61½ (157.2)	66½ (169.2)	66½ (169.2)	66½ (169.2)
B — Cabinet Height Without Hinge — in. (cm)	61½ (155.6)	66 (167.6)	66 (167.6)	66 (167.6)
C — Cabinet Depth With Door Handle — in. (cm)	28½ (72.4)	29½ (74.7)	29½ (74.7)	29½ (74.9)
D — Cabinet Depth Without Door — in. (cm)	25¼ (64.1)	26⅞ (66.4)	26⅞ (66.4)	26¼ (66.7)
E — Cabinet Width — in. (cm)	28 (71.1)	29½ (75.2)	29½ (75.2)	29½ (75.2)
F — Depth With Door @ 90° — in. (cm)	54½ (138.4)	56½ (143.3)	56½ (143.3)	56½ (143.5)
G — Water Line Location From Left Side Facing Back Of Unit — in. (cm)	2 (5.1)	30⅞ (77.2)	30⅞ (77.2)	30⅞ (77.5)
H — Water Line Location From Bottom — in. (cm)	6 (15.2)	5⅞ (13.5)	5⅞ (13.5)	5¼ (13.7)
I — Power Cord Location From Left Side Facing Back Of Unit — in. (cm)	2 (5.1)	2 (5.1)	2 (5.1)	2 (5.1)
J — Power Cord Location From Bottom — in. (cm)	11 (28)	10¼ (27.3)	10¼ (27.3)	10¼ (27.3)
K — Side Wall Clearance For 90° Door Opening — in. (cm)	1 (2.5)	1½ (3.8)	1½ (3.8)	1½ (3.8)
Approximate Shipping Weight — lbs. (kg)	208 (94.3)	193.6 (87.8)	193.6 (87.8)	193.6 (87.8)

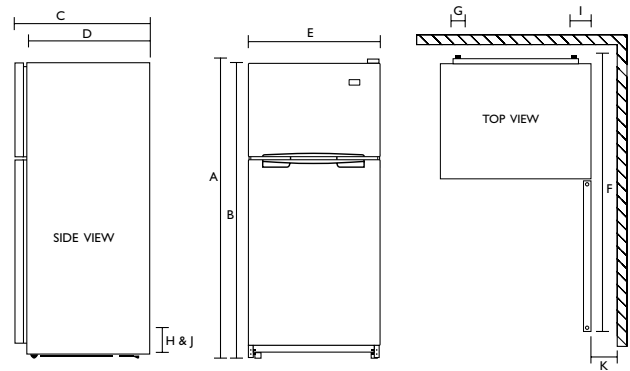


All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® 21 CU. FT. TOP-FREEZER REFRIGERATORS


MODELS	ATB2132AR	ATB2136AR	ATF2136AR
Colors			
White	•	•	•
Bisque	•		•
Black		•	•
Stainless Steel		•	•
Silver Metallic	•		
Fresh Food Interior			
Light	•	•	•
Central Cool™ System	•	•	•
Adjustable Spillsaver™ Glass Shelves		•	•
Glass Crisper Shelf	•	•	•
Humidity-Controlled Garden Fresh™ Crisper Drawers	2	2	2
Dairy Center	•	•	•
Fixed Gallon Door Shelves	2		
Fixed Door Buckets	1	1	1
Adjustable Gallon Door Buckets		4	4
Freezer Interior			
Covered Light		•	•
Wire Shelf	•	•	•
Optional Icemaker And Ice Bucket	UKI1500AXX	UKI1500AXX	Factory-Installed
FlexAction Ice Cube Trays	2	2	
Capacities And Unit Dimensions			
Kitchen Cabinet Opening — in. (cm)	33 (83.8)	33 (83.8)	33 (83.8)
Top/Back Air Clearance — in. (cm)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)	½ (1.3)½ (1.3)
Total Refrigerator Capacity — cu. ft. (cu. m)	20.97 (0.59)	20.97 (0.59)	20.97 (0.59)
Fresh Food Capacity — cu. ft. (cu. m)	14.9 (0.42)	14.9 (0.42)	14.9 (0.42)
Frozen Food Capacity — cu. ft. (cu. m)	6.07 (0.17)	6.07 (0.17)	6.07 (0.17)
A — Cabinet Height With Hinge Cover — in. (cm)	66½ (169.2)	66½ (169.2)	66½ (169.2)
B — Cabinet Height Without Hinge — in. (cm)	66 (167.6)	66 (167.6)	66 (167.6)
C — Cabinet Depth With Door Handle — in. (cm)	30⅞ (76.7)	30⅞ (76.7)	30¼ (76.8)
D — Cabinet Depth Without Door — in. (cm)	26⅞ (68.5)	26⅞ (68.5)	27 (68.6)
E — Cabinet Width — in. (cm)	32⅞ (82.9)	32⅞ (82.9)	32¼ (83.2)
F — Depth With Door @ 90° — in. (cm)	60⅞ (154.2)	60⅞ (154.2)	60¼ (154.3)
G — Water Line Location From Left Side Facing Back Of Unit — in. (cm)	27⅞ (69.1)	27⅞ (69.1)	27⅞ (69.1)
H — Water Line Location From Bottom — in. (cm)	5⅞ (13.5)	5⅞ (13.5)	5¼ (13.7)
I — Power Cord Location From Left Side Facing Back Of Unit — in. (cm)	2 (5.1)	2 (5.1)	2 (5.1)
J — Power Cord Location From Bottom — in. (cm)	10¼ (27.3)	10¼ (27.3)	10¼ (27.3)
K — Side Wall Clearance For 90° Door Opening — in. (cm)	1⅞ (2.8)	1⅞ (2.8)	1½ (2.9)
Approximate Shipping Weight — lbs. (kg)	220.5 (100)	220.5 (100)	220.5 (100)

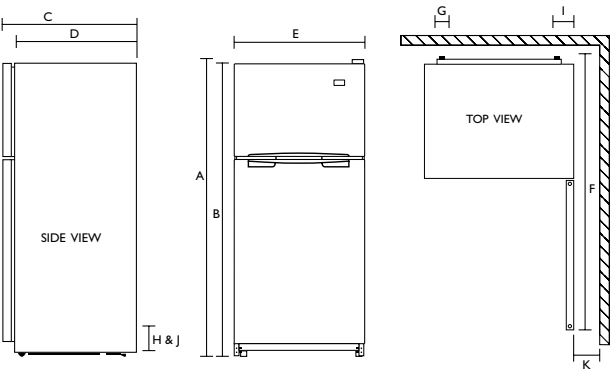


All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® DEEPFREEZE® UPRIGHT FREEZERS


MODELS	AFU1202BW	AQU1525AEW	AFU1705BW	AFU2005BW	AFU1567BW	AFU1767BW	AFU2067BW
<b>Color</b>							
White	•	•	•	•	•	•	•
ENERGY STAR®-Qualified 		•					
<b>Deepfreeze® Freezer Interior</b>							
Frozen Food Capacity — cu. ft. (cu. m)	11.8 (0.33)	15.2 (0.43)	16.8 (0.47)	19.6 (0.55)	15.0 (0.43)	16.8 (0.47)	19.6 (0.55)
Defrost Type	Manual	Manual	Manual	Manual	Free-O-Frost™	Free-O-Frost™	Free-O-Frost™
Adjustable Temperature Control	•	•	•	•	•	•	•
Cabinet Shelves	3	3	3	4	3	4	4
Door Shelves	5	4	5	6	4	5	6
Power On Light					•	•	•
Interior Light		•	•	•	•	•	•
Lock With Key		•	•	•	•	•	•
Storage Gate	•	•			•		
Storage Basket			•	•		•	•
Fast-Freeze Settings		•	•	•	•	•	•
Temperature Alarm System							•
Defrost Drain	•	•	•	•			
<b>Exterior Features</b>							
Handle Type	Recessed	Recessed	Full	Full	Full	Full	Full
Flat Back					•	•	•
Seamless Interior Liner	•	•	•	•	•	•	•
Textured Cabinet	•	•	•	•	•	•	•
Square Door Style	•	•	•	•	•	•	•
<b>Exterior Dimensions — in. (cm)</b>							
A — Height	60½ (153.7)	60 (152.4)	66½ (168.9)	66½ (168.9)	60½ (153.7)	66½ (168.9)	66½ (168.9)
B — Width	24 (61)	28 (71.1)	30 (76.2)	33 (83.8)	30 (76.2)	30 (76.2)	33 (83.8)
C — Overall Depth	27½ (69.7)	28½ (72.4)	28½ (71.9)	28½ (71.9)	28½ (71.9)	28½ (71.9)	28½ (71.9)
D — Depth With Door Open 90°	50½ (128.3)	56½ (143.5)	56½ (143.5)	59½ (151.1)	56½ (143.5)	56½ (143.5)	59½ (151.1)
Air Clearance — Sides And Top	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	164 (74.4)	192 (87.1)	202/206 (91.6/93.4)	210 (95.3)	192 (87.1)	202/206 (91.6/93.4)	210 (95.3)
<b>Electrical Requirements</b>							
V/Hz	115/60	115/60	115/60	115/60	115/60	115/60	115/60
Commercial Rating				•	•	•	•

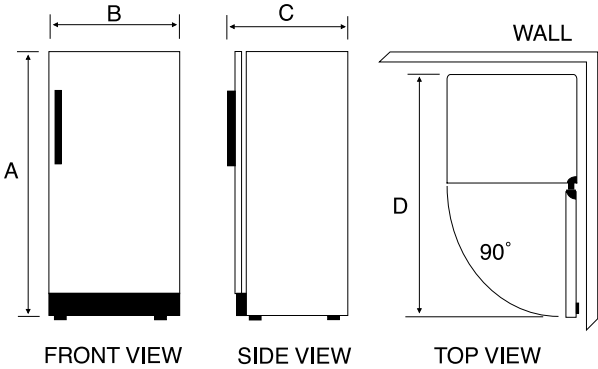


All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® DEEPFREEZE® CHEST FREEZERS

MODELS	AQC0503BW	AQC0722BRW	AQC1526BEW	AQC2227BRW
<b>Color</b>				
White	•	•	•	•
ENERGY STAR®-Qualified 			•	
<b>Deepfreeze® Freezer Interior</b>				
Frozen Food Capacity — cu. ft. (cu. m)	5.0 (0.14)	7.0 (0.20)	14.8 (0.42)	21.7 (0.61)
Frozen Food Storage — lbs. (kg)	150 (68.0)	210 (95.3)	410 (186.0)	545 (247.2)
Defrost Type	Manual	Manual	Manual	Manual
Adjustable Temperature Control	•	•	•	•
Removable Baskets	1	1	2	4
Basket Storage Levels	1			2
Power On Light	•	•	•	•
Interior Light				•
Lock With Key		•	•	•
Defrost Drain	•	•	•	•
Hose Adapter	•	•	•	•
Seamless Interior Liner	•	•	•	•
<b>Exterior Features</b>				
Handle Type	Grip	Grip	Grip	Grip
Type Of Cabinet	Square	Square	Square	Square
Type Of Lid	Flat	Flat	Flat	Flat
<b>Exterior Dimensions — in. (cm)</b>				
A — Height Including Lid	31⅞ (80.5)	35 (88.9)	35 (88.9)	35 (88.9)
B — Width	29½ (74.6)	31½ (80.0)	46.1 (117.2)	64½ (164.8)
C — Overall Depth	23½ (60)	24⅞ (61.1)	29½ (74.6)	29½ (74.6)
D — Height With Lid Open 90° Or 75°	55½ (141.0)	54¼ (137.8)	60½ (153.4)	60½ (153.4)
Air Clearance — Sides And Back	3 (7.6)	3 (7.6)	3 (7.6)	3 (7.6)
Approximate Shipping Weight — lbs. (kg)	95 (43.0)	115 (292.1)	164 (416.6)	220 (558.8)
<b>Electrical Requirements</b>				
V/Hz	115/60	115/60	115/60	115/60
Commercial Rating			•	•

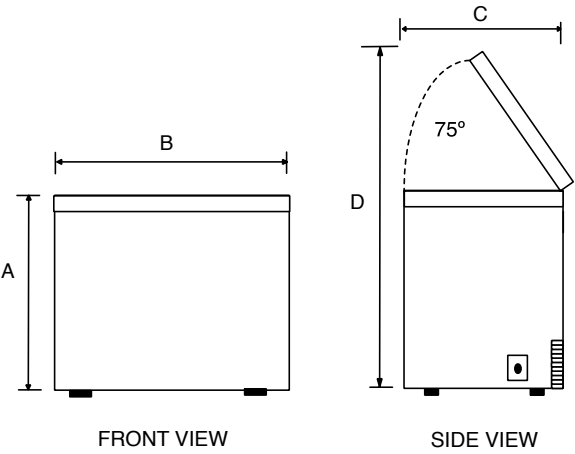

All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® FREESTANDING GAS RANGES

5.3 CU. FT.			4.5 CU. FT.		
MODELS	AGR5725RD	AGR5835QD	AGR4400AD	AGR4412AD	AGR5712BD
Style	30" Gas	30" Gas	30" Gas	30" Gas	30" Gas
Colors					
White	•	•	•	•	•
Bisque	•			•	
Black	•	•			•
Stainless Steel	•	•			
Silver Metallic					•
Interior Features					
Overall Capacity — cu. ft.	5.3	5.3	4.5	4.5	4.5
Self-Cleaning Oven With Adjustable Cleaning Levels	•	•			•
Temp-Assure™ Preheat	•	•			•
TimeSavor™ Speed Cook With Auto Conversion		•			
Hidden Bake Burner	•	•	•	•	•
Interior Oven Light	•	Automatic	•	•	•
Oven Rack Positions	8	8	6	6	6
Standard Oven Racks	1	2	2	2	2
EasyRack™ Oven Rack (UXA5900AQX)	1	1			
Hi/Lo Broil	•	•			•
Storage Drawer	•	•			•
Exterior Features					
Smooth-Gloss Backguard	•	•	•	•	•
Removable Gloss Knobs	•	•	•	•	•
SpillSaver™ Upswept Cooktop Design	•	•	•	•	•
Heavy-Duty, High-Gloss, Cast-Iron Burner Grates	•	•			
Cast-Iron Grates				•	•
Heavy Steel Grates			•		
Lift-Off Burner Caps	•	•			
Sealed-Surface Burners	•	•	•	•	•
LP Convertible/Kit Included	•	•	•	•	•
Extra-Large Oven Window	•	•		•	•
Controls					
Easy Touch Oven Controls	500	800		300	500
Electronic Clock With Timer	•	•			•
Temperature Display	•	•			•
Cook & Hold Setting	•	•			•
Favorite Setting		•			
Keep Warm Setting	•	•			•
Delay Setting	•	•			•
12-Hour Auto Shutoff	•	•			•
Control Lockout	•	•			•
Sabbath Mode	•	•			•
Cooktop Features					
Number Of Burners	4	4	4	4	4
16,000-/14,000-BTU Burner	RF	RF			
12,000-/8,500-BTU Burner			RF	RF	RF
9,200-/9,100-BTU Burners	LF, RR	LF, RR			
9,200-/8,000-BTU Burners			LF, RR	LF, RR	LF, RR
7,200-/6,500-BTU Burner			LR	LR	LR
5,000-/4,000-BTU Burner	LR	LR			

All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® FREESTANDING ELECTRIC RANGES

5.3 CU. FT.			5.1 CU. FT.			4.3 CU. FT.	
MODELS	AER5725QA	AER5845RA	AER5511BA	AER5712BA	AER5722BA	AER4311AA	AER5710BA
Style	30" Radiant	30" Radiant	30" Coil	30" Radiant	30" Radiant	30" Coil	30" Radiant
Colors							
White	•	•	•	•	•	•	
White With Black							•
Bisque			•		•		
Black	•	•	•	•	•		
Stainless Steel	•	•			•		
Silver Metallic				•			
Interior Features							
Overall Capacity — cu. ft.	5.3	5.3	5.1	5.1	5.1	4.3	4.3
Self-Cleaning Oven With Adjustable Cleaning Levels	•	•	•	•	•		•
Temp-Assure™ Preheat	•	•	•	•	•	•	•
TimeSavor™ Speed Cook With Auto Conversion		•					
Hidden Bake Element	•	•					
Interior Oven Light	•	•		•	•	•	
Oven Rack Positions	8	8	6	6	6	5	5
Standard Oven Racks	1	2	1	1	1	2	2
Offset Oven Racks			1	1	1		
EasyRack™ Oven Rack (UXA5900AQX)	1	1					
Hi/Lo Broil	•	•	•	•	•	•	•
Storage Drawer	•	•	•	•	•	•	•
Exterior Features							
Smooth-Gloss Backguard	•	•	•	•	•		
Porcelain Backguard						•	•
Removable Gloss Knobs	•	•	•	•	•	•	•
Porcelain-Steel Cooking Surface			•			•	
Glass-Ceramic Cooking Surface	•	•		•	•		•
SpillSaver™ Upswept Cooktop Design	•	•	•	•	•	•	•
Drip Bowls			Porcelain-Enamel			Chrome	
Removable Coil Elements			•			•	
Controls							
Easy Touch Oven Controls	500	800	500	500	500	300	500
Electronic Clock With Timer	•	•	•	•	•	•	•
Cook & Hold Setting	•	•	•	•	•		•
Favorite Setting		•					
Keep Warm Setting	•	•	•	•	•		•
Delay Setting	•	•	•	•	•		•
12-Hour Auto Shutoff	•	•	•	•	•	•	•
Control Lockout	•	•	•	•	•	•	•
Sabbath Mode	•	•	•	•	•	•	•
Element ON/HOT Indicator Light	•	•		•	•		•
Cooktop Features							
Number Of Elements	4	5	4	4	5	4	4
6", 1,200-Watt Coil Elements	LR, RR						
6", 1,500-Watt Coil Elements			LF, RR			LF, RR	
8", 2,350-Watt Coil Elements			RF, LR			RF, LR	
6", 1,200-Watt Ribbon Radiant Elements		LR, RR		LF, RR	LR, RR		LF, RR
9", 2,500-Watt Ribbon Radiant Elements	LR			RF, LR			RF, LR
9"/6", 2,400-/1,200-Watt Dual Elements	RF	LF			LF, RF		
12", 2,700-Watt Power Boost™ Element		RF					
6", 100-Watt Warming Zone™ Element		RC			RC		

All models listed may not be available from every Amana dealer.  
Amana's ongoing commitment to quality products may mean a change in product specifications without notice.








AMANA® SLIDE-IN GAS RANGES

MODELS	AGS1740BD	AGS3760BD	AGS5730BD
Style	30" Gas	30" Gas	30" Gas
<b>Colors</b>			
White	•	•	•
Bisque	•	•	•
Black		•	•
Stainless Steel		•	•
<b>Interior Features</b>			
Overall Capacity — cu. ft.	4.5	4.5	4.5
Self-Cleaning Oven		•	•
Interior Oven Light	Manual	Manual	Automatic
Oven Rack Positions	5	5	5
Standard Oven Racks	2	2	1
Storage Drawer	•	•	•
EasyRack™ Oven Rack (UXA5900AQX)			1
<b>Exterior Features</b>			
Removable Gloss Knobs	•	•	•
SpillSaver™ Upswept Cooktop Design	•	•	•
Heavy-Duty, High-Gloss, Cast-Iron Burner Grates	Four-Piece	Four-Piece	Two-Piece
Trivet Grate			•
Sealed-Surface Burners With Lift-Off Burner Caps	•	•	•
LP Convertible/Kit Included	7507P405-60	7507P405-60	7507P405-60
Oven Window	Large	Extra-Large	Extra-Large
<b>Controls</b>			
Easy Touch Oven Controls	500	700	800
Electronic Clock With Timer	•	•	•
Cook & Hold Setting	•	•	•
Favorite Setting		•	•
Keep Warm Setting	•	•	•
Delay Setting	•	•	•
12-Hour Auto Shutoff	•	•	•
Control Lockout	•	•	•
Sabbath Mode	•	•	•
<b>Cooktop BTUs</b>			
Number Of Burners	4	4	4
16,000-/14,000-BTU Burner			RF
12,000-/11,000-BTU Burner	RF	RF	
9,200-/9,100-BTU Burners	LF, RR	LF, RR	LF, RR
5,000-/4,000-BTU Burner	LR	LR	LR
<b>Exterior Dimensions — in. (cm)</b>			
Overall Height	36 <sup>1</sup> / <sub>8</sub> (92.5)	36 <sup>1</sup> / <sub>8</sub> (92.5)	36 <sup>1</sup> / <sub>8</sub> (92.5)
Overall Width	30 <sup>3</sup> / <sub>4</sub> (78.1)	30 <sup>3</sup> / <sub>4</sub> (78.1)	30 <sup>3</sup> / <sub>4</sub> (78.1)
Depth Including Handle	28 <sup>7</sup> / <sub>8</sub> (71.9)	28 <sup>7</sup> / <sub>8</sub> (71.9)	28 <sup>7</sup> / <sub>8</sub> (71.9)
Height To Cooktop	36 (91.4)	36 (91.4)	36 (91.4)
Approximate Shipping Weight — lbs. (kg)	228 (108)	228 (108)	228 (108)
Total Connected Load — kw @ 120V	10A Or Less	10A Or Less	10A Or Less

All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.

INSTALLATION INFORMATION

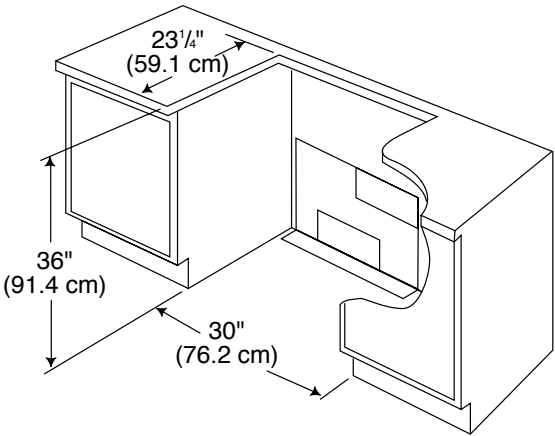

AMANA® ELECTRIC WALL OVENS

MODELS	AEW3530DD	AEW4530DD	AEW3630DD	AEW4630DD
Style	30" Single Electric	30" Single Electric Convection	30" Double Electric	30" Double Electric Convection
<b>Colors</b>				
White	•	•	•	•
Black	•	•	•	•
Stainless Steel	•	•	•	•
<b>Oven Capacity — cu. ft.</b>				
Upper	3.8	3.8	3.8	3.8
Lower			3.8	3.8
<b>Interior Features</b>				
Easy-Use Convection With Auto Conversion		•		Upper
Adjustable Self-Cleaning Oven With Auto Door Lock	•	•	Upper/Lower	Upper/Lower
Six-Pass Broiler	•	•	•	•
Automatic Oven Light	•	•	•	•
Large Viewing Window	•	•	•	•
Porcelain Broiler Pan	•	•	•	•
Rack Positions	4	4	4	4
Oven Racks — Upper	2	3	2	3
Oven Racks — Lower			2	2
<b>Controls</b>				
Easy Touch Controls	•	•	•	•
Electronic Clock With Timer	•	•	•	•
Favorite Setting	•	•	•	•
Cook & Hold Setting	•	•	Upper Only	Upper Only
Delay-Clean Option	•	•	•	•
Sabbath Mode	•	•	•	•
Control Lockout	•	•	•	•
<b>Oven Wattage @ 240V</b>				
Easy-Use Convection		1,850		1,850
Bake	2,800	2,800	2,800	2,800
Six-Pass Broiler	3,600	3,600	3,600	3,600
<b>Interior Dimensions — in. (cm)</b>				
Height	15 (38.1)	15 (38.1)	15 (38.1)	15 (38.1)
Width	23 <sup>1</sup> / <sub>2</sub> (59.7)	23 <sup>1</sup> / <sub>2</sub> (59.7)	23 <sup>1</sup> / <sub>2</sub> (59.7)	23 <sup>1</sup> / <sub>2</sub> (59.7)
Depth	18 <sup>1</sup> / <sub>2</sub> (47)	18 <sup>1</sup> / <sub>2</sub> (47)	18 <sup>1</sup> / <sub>2</sub> (47)	18 <sup>1</sup> / <sub>2</sub> (47)
<b>Exterior Dimensions — in. (cm)</b>				
Size	30 (76.2)	30 (76.2)	30 (76.2)	30 (76.2)
A — Overall Height	28 <sup>3</sup> / <sub>4</sub> (71.8)	28 <sup>3</sup> / <sub>4</sub> (71.8)	50 <sup>1</sup> / <sub>4</sub> (127.6)	50 <sup>1</sup> / <sub>4</sub> (127.6)
B — Overall Width	29 <sup>1</sup> / <sub>4</sub> (75.6)	29 <sup>1</sup> / <sub>4</sub> (75.6)	29 <sup>1</sup> / <sub>4</sub> (75.6)	29 <sup>1</sup> / <sub>4</sub> (75.6)
C — Overall Depth	24 <sup>1</sup> / <sub>8</sub> (62.1)	24 <sup>1</sup> / <sub>8</sub> (62.1)	24 <sup>1</sup> / <sub>8</sub> (62.1)	24 <sup>1</sup> / <sub>8</sub> (62.1)
D — Cutout Height	27 <sup>1</sup> / <sub>4</sub> (70.8)	27 <sup>1</sup> / <sub>4</sub> (70.8)	50 (127.0)	50 (127.0)
E — Cutout Width	28 <sup>1</sup> / <sub>4</sub> (72.4)	28 <sup>1</sup> / <sub>4</sub> (72.4)	28 <sup>1</sup> / <sub>4</sub> (72.4)	28 <sup>1</sup> / <sub>4</sub> (72.4)
F — Cutout Depth	24 (61.0)	24 (61.0)	24 (61.0)	24 (61.0)
Under-Counter/Cooktop Installation	•	•		
Total Connected Load — kw @ 240V/208V	3.6/2.7	3.6/2.7	7.2/5.4	7.2/5.4
Approximate Shipping Weight — lbs. (kg)	140 (63)	140 (63)	235 (106)	235 (106)


All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.


INSTALLATION INFORMATION

Typical clearance from floor when installing in wall is 35" (89 cm). For single wall oven under-counter installation with a cooktop, refer to cooktop installation instructions. Distance from countertop to bottom of cutout must be 31<sup>3</sup>/<sub>4</sub>" (80.7 cm). Stacked installation [3" (7.6 cm) min. between cutouts] and side-by-side installation [1<sup>3</sup>/<sub>4</sub>" (4.5 cm) min. between cutouts] is also possible.

Single Wall Oven

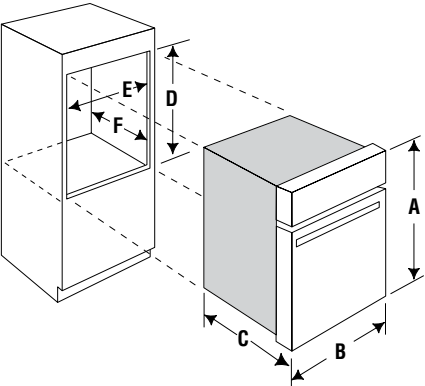

Double Wall Oven

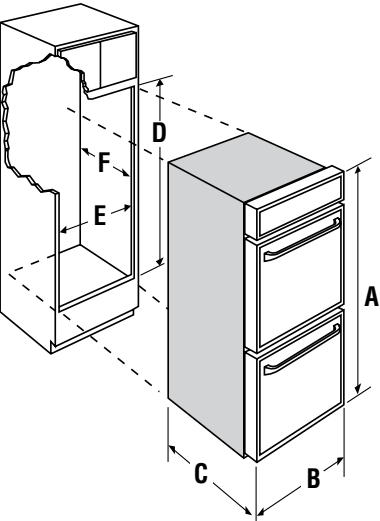




AMANA® GAS COOKTOPS

MODELS	AKS3040B	AKS3640
Style	30" Sealed Gas Burner	36" Sealed Gas Burner
<b>Colors</b>		
White	•	•
Black	•	•
Stainless Steel	•	•
<b>Installation</b>		
Installs Over 30" Amana® Wall Oven	•	•
Countertop/Island/Peninsula Installation	•	•
Right- Or Left-Hand Installation	•	
<b>Burners</b>		
Upfront Controls		•
Sealed Burners With Spark Ignition	4	5
Removable Burner Caps	•	•
One-Piece Cast-Iron Burner Grates	2	3
<b>Grate Color</b>		
White Model	Gray Gloss	Gray Gloss
Bisque Model	Taupe Gloss	Taupe Gloss
Black Model	Black Matte	Black Matte
Stainless Steel Model	Black Matte	Black Matte
<b>Burner BTUs (Nat./LP)</b>		
Left Front	9,200/9,100	9,200/9,100
Right Front	12,500/10,500	12,500/10,500
Left Rear	5,000/4,000	10,500/9,100
Right Rear	9,200/9,100	9,200/9,100
Center		9,200/9,100
650-BTU Simmer Setting	• (LR)	
<b>Exterior Dimensions — in. (cm)</b>		
A — Width	29½ (74.9)	36 (91.4)
B — Depth	21½ (54.6)	21 (53.3)
C — Top Of Cooktop To Bottom Of Burner Box	5½ (13.0)	5¾ (13.7)
<b>Cutout Dimensions — in. (cm)</b>		
D — Top Of Counter To Bottom Of Regulator	7¼ (18.4)	7¼ (18.4)
Overall Height Of Burner Box	3⅜ (9.7)	3⅝ (9.7)
E — Cutout Depth	19⅞ (50.6)	19⅞ (50.6)
F — Cutout Width	28½ (72.4)	34½ (87.6)
G — Front Countertop Clearance	2¼ (5.4) min.	2¼ (5.4) min.
H — Back Countertop Clearance	1 (2.5) min.	1 (2.5) min.
J — Side Clearance (Each Side)	6 (15.2) min.	6 (15.2) min.

INSTALLATION INFORMATION

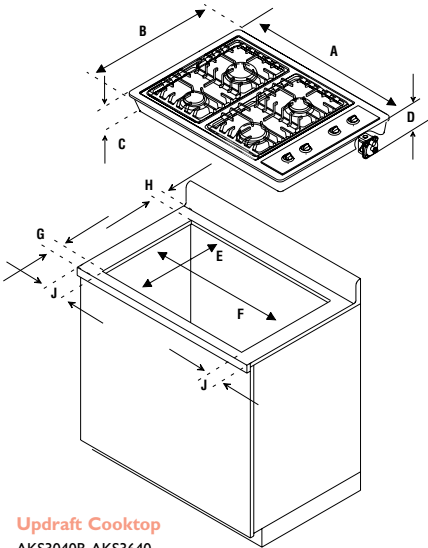

All models listed may not be available from every Amana dealer.


Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® ELECTRIC COOKTOPS

MODELS	AKT3040	AKT3650
Style	30" Electric Radiant Smoothtop	36" Electric Radiant Smoothtop
<b>Colors</b>		
Frost White	•	•
True Black	•	•
Black With Stainless Steel Trim	•	•
<b>Installation</b>		
Installs Over 30" Amana® Wall Oven	•	•
Countertop/Island/Peninsula Installation	•	•
Right- Or Left-Hand Installation	•	•
<b>Cooktop Surface</b>		
	Glass-Ceramic	Glass-Ceramic
<b>Controls</b>		
Power ON Indicator Lights	2	2
Hot-Surface Indicator Lights	4	5
<b>Element Wattage @ 240V</b>		
6" Ribbon Radiant	1,200 (LR)	1,200 (LR)
7" Ribbon Radiant	1,500 (RF)	1,500 (RF)
8" Ribbon Radiant	2,000 (RR)	2,000 (RR)
9"½" Dual Ribbon Radiant	2,500/1,000 (LF)	2,500/1,000 (LF)
Warming Zone™ Element		100 (C)
<b>Exterior Dimensions — in. (cm)</b>		
A — Width	29½ (75.1)	35½ (90.8)
B — Depth	21½ (54.6)	21½ (54.6)
C — Total Product Depth	3¼ (7.9)	3¼ (7.9)
<b>Cutout Dimensions — in. (cm)</b>		
Overall Height Of Burner Box	2¼ (7.3)	2¼ (7.3)
D — Clearance Below Countertop	4¼ (11.4)	4¼ (11.4)
E — Cutout Depth	20¼ (52.7)	20¼ (52.7)
F — Cutout Width	28¾ (73.3)	34¼ (86.7)
G — Front Countertop Clearance	2¼ (6.4) min.	2¼ (6.4) min.
H — Back Countertop Clearance	½ (1.3) min.	½ (1.3) min.
J — Side Clearance (Each Side)	½ (1.3) min.	½ (1.3) min.
Total Connected Load — kw @ 240V/208V	7.2/5.4	7.3/5.5

INSTALLATION INFORMATION

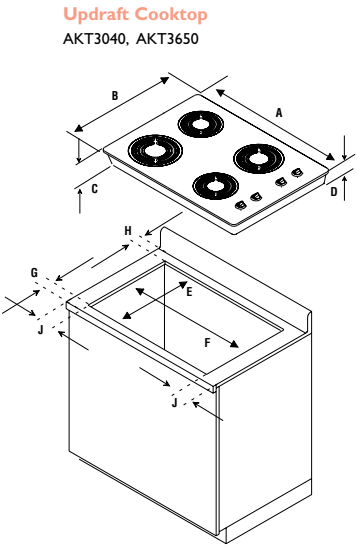

Allow 30" between cooking surface and unprotected wood or metal cabinet above cooktop; 24" between cooking surface and protected wood or metal cabinet above cooktop. Cabinet bottom must be protected by at least ¼" thick millboard with not less than No. 28 MSG sheet steel, .015" thick stainless steel, .024" thick.

Refer to installation instructions packaged with unit or consult your local Amana representative before making any cutouts or final designs.

All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® RADARANGE® COUNTERTOP MICROWAVE OVENS

MODELS	AMC4080AA	AMC5101AA	AMC5143AA	AMC2206BA	AMC6158BA
Style	Microwave	Microwave	Microwave	Microwave	Microwave/Convection
Colors					
White	•	•	•	•	•
Bisque			•		
Black		•		•	•
Stainless Steel		•	•		
Features					
Capacity — cu. ft.	0.8	1.0	1.4	2.0	1.5
Wattage	800	1,000	1,100	1,100	1,000
Turntable	•	•	•	•	•
10 Power Levels	•	•	•	•	•
Touchmatic® Control System	•	•	•	•	•
Digital Clock	12-Hour	12-Hour	24-Hour	•	12-/24-Hour
Sound On/Off		•	Low/Mid/Hi/ Melody/Off	•	•
Kitchen Timer		•	•	•	•
Program Cooking Stages			Multi	I	I
More/Less Adjust		•	•	•	•
Custom Program				•	•
Warm					•
Preheat					•
Auto Defrost	•	•	•	•	•
Convection/Combination (Roast/Bake)					•
Control Lockout		•	•	•	•
Interior Oven Light	•	•	•	•	•
Cooking Complete Reminder	•	•	•	•	•
Under-Cabinet Installation — Kit Included	•				
In-Wall Trim Kit			UXA0024AX*	UMTK27 UMTK30	UCTK27 UCTK30
Programmed Pads					
Popcorn	•	•	Sensor	•	•
Potato	•	•	Sensor	•	•
Beverage	•	•		•	•
Pizza	•	•	Sensor	•	•
Bacon		•			
Fresh Vegetable	•		Sensor	•	•
Frozen Vegetable			Sensor	•	•
Frozen Breakfast			Sensor	•	•
Frozen Dinner	•		Sensor	•	•
Handy Helper		3-Option	3-Option		
Kids' Meals		4-Option	4-Option	4-Option	4-Option
Snacks		4-Option	4-Option	4-Option	4-Option
Auto Reheat		•	Sensor		•
Lbs./Kg Option		•	•		•
Exterior Dimensions — in. (cm)					
Height	10 <sup>3</sup> / <sub>16</sub> (27.5)	11 <sup>1</sup> / <sub>16</sub> (29.7)	12 <sup>5</sup> / <sub>16</sub> (31.3)	13 <sup>1</sup> / <sub>4</sub> (33.7)	13 <sup>3</sup> / <sub>4</sub> (35.2)
Width	19 <sup>1</sup> / <sub>4</sub> (48.9)	20 <sup>5</sup> / <sub>16</sub> (51.6)	21 <sup>1</sup> / <sub>4</sub> (55.6)	23 <sup>3</sup> / <sub>4</sub> (60.3)	23 <sup>3</sup> / <sub>4</sub> (60.3)
Depth	13 <sup>3</sup> / <sub>4</sub> (35.2)	14 <sup>5</sup> / <sub>16</sub> (37.9)	17 <sup>1</sup> / <sub>4</sub> (43.9)	18 <sup>1</sup> / <sub>4</sub> (46.4)	23 (58.4)
Stainless Steel Depth		16 <sup>1</sup> / <sub>2</sub> (41.9)	18 <sup>5</sup> / <sub>16</sub> (46.5)		
Interior Dimensions — in. (cm)					
Height — Turntable In Place, If Applicable	7 <sup>15</sup> / <sub>16</sub> (20.2)	9 <sup>1</sup> / <sub>4</sub> (23.2)	9 <sup>13</sup> / <sub>16</sub> (24.9)	10 <sup>1</sup> / <sub>16</sub> (27.7)	10 <sup>1</sup> / <sub>2</sub> (26.7)
Width	13 (33.0)	13 <sup>1</sup> / <sub>2</sub> (33.6)	14 <sup>1</sup> / <sub>4</sub> (37.5)	17 <sup>3</sup> / <sub>8</sub> (44.2)	16 <sup>1</sup> / <sub>4</sub> (41.3)
Depth	13 (33.0)	13 <sup>1</sup> / <sub>16</sub> (34.8)	16 <sup>1</sup> / <sub>16</sub> (40.8)	17 <sup>1</sup> / <sub>16</sub> (45.5)	16 <sup>1</sup> / <sub>2</sub> (41.9)

\*Do not install above wall oven. See page 59 for trim kit information.

All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.




AMANA® RADARANGE® OVER-THE-RANGE MICROWAVE OVENS

MODELS	AMV1154BA	AMV5164BA	AMV5206BA
Colors			
White	•	•	•
Bisque	•	•	
Black	•	•	•
Stainless Steel	•	•	•
Silver Metallic	•		
Features			
Capacity — cu. ft.	1.5	1.6	2.0
Wattage	1,000	1,000	1,150
Turntable	•	•	•
Turntable On/Off		•	•
Wire Racks		I	I
Word-Prompt Display	LED	Scrolling 7-Digit	Scrolling 2-Line
Digital Clock	•	12-Hour	12-Hour
Kitchen Timer	•	•	•
Light Timer Delay Option		•	•
Interior Oven Light	•	•	•
Surface Lights	Hi/Low/Off	Hi/Low/Off	Halogen
Control Lockout	•	•	•
Cooking Complete Reminder		•	•
Control Setup		•	•
Touchmatic® Control System	•	•	•
10 Power Levels	•	•	•
Program Cooking Stages	2	4	4
Custom Program		•	•
More/Less Adjust	•	•	•
Warm/Hold		•	•
Soften			•
Melt			•
Auto Defrost	•	•	•
Time Defrost		•	•
Rapid Defrost (1 Lb.)		•	•
Charcoal Odor Filter	•	•	•
Vent Fan	2-Speed	2-Speed	5-Speed
Exhaust (Max.)	220 CFM	220 CFM	300 CFM
Programmed Pads			
Popcorn	•	Sensor	Sensor
Baked Potato	•	Sensor	Sensor
Pizza Slice	•	Sensor	
Frozen Entrée			Sensor
Vegetable	•	Sensor	Sensor
Auto Reheat	3 Options		
Auto Cook	4 Options		
Sensor Cook		4 Options	4 Options
Sensor Reheat		3 Options	3 Options
Exterior Dimensions — in. (cm)			
Height	16 <sup>1</sup> / <sub>2</sub> (41.9)	16 <sup>1</sup> / <sub>16</sub> (41.8)	16 <sup>1</sup> / <sub>16</sub> (41.8)
Width	29 <sup>9</sup> / <sub>16</sub> (75.9)	29 <sup>9</sup> / <sub>16</sub> (74.5)	29 <sup>9</sup> / <sub>16</sub> (74.5)
Depth (excludes handle)	15 (38.1)	15 <sup>1</sup> / <sub>4</sub> (38.7)	15 <sup>1</sup> / <sub>4</sub> (38.7)
Cabinet Cutout Dimensions — in. (cm)			
Width	30 (76.2) min.	30 (76.2) min.	30 (76.2) min.
Top Edge From Cooking Surface	33 (83.8) min.	33 (83.8) min.	33 (83.8) min.
Range Backguard To Bottom Of Microwave	2 (5.08)	2 (5.08)	2 (5.08)
Interior Dimensions — in. (cm)			
Height — Turntable In Place, If Applicable	9 <sup>9</sup> / <sub>16</sub> (23.8)	8 <sup>9</sup> / <sub>16</sub> (22.4)	10 <sup>1</sup> / <sub>4</sub> (26.0)
Width	20 <sup>1</sup> / <sub>16</sub> (51.0)	21 <sup>1</sup> / <sub>16</sub> (55.1)	22 <sup>1</sup> / <sub>4</sub> (58.1)
Depth	14 <sup>1</sup> / <sub>16</sub> (36.5)	14 <sup>1</sup> / <sub>16</sub> (36.0)	14 <sup>3</sup> / <sub>4</sub> (36.5)

All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.

INSTALLATION INFORMATION

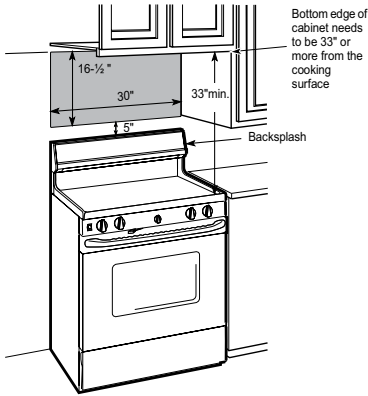

Cutout Dimensions

- A. Opening Width: 30" (76.2 cm) min.
- B. Counter to Top of Opening: 33" (83.82 cm) min.
- C. Range Backguard to Bottom of Microwave: 2" (5.1 cm) min.

Refer to installation instructions packaged with unit or consult your local Amana representative before making any cutouts or final designs.

TRIM KIT INFORMATION



Shown: AMC2206BAB With Trim Kit

Trim Kits For Built-In AMC2206BA:

Kits: UMTK27 W/Q/B/SS in 27", UMTK30 W/Q/B/SS in 30"

Cutout Dimensions — in. (cm):


	UMTK27	UMTK30
A. Width	25 <sup>1</sup> / <sub>2</sub> (64.8)	25 <sup>1</sup> / <sub>2</sub> (64.8)
B. Microwave Height	16 <sup>1</sup> / <sub>4</sub> (42.6)	16 <sup>1</sup> / <sub>4</sub> (42.6)
C. Depth	23 <sup>3</sup> / <sub>4</sub> (60.3)	23 <sup>3</sup> / <sub>4</sub> (60.3)

Trim Kits For Built-In AMC6158BA:

Kits: UCTK27 W/B in 27", UCTK30 W/B in 30"

Cutout Dimensions — in. (cm):

	UCTK27	UCTK30
A. Width	25 <sup>1</sup> / <sub>2</sub> (64.8)	25 <sup>1</sup> / <sub>2</sub> (64.8)
B. Microwave Height	16 <sup>1</sup> / <sub>4</sub> (42.6)	16 <sup>1</sup> / <sub>4</sub> (42.6)
C. Depth	23 <sup>3</sup> / <sub>4</sub> (60.3)	23 <sup>3</sup> / <sub>4</sub> (60.3)





AMANA® KITCHEN HOODS

MODELS	UXT2030A UXT2036A	UXT3030A UXT3036A	UXT4030A UXT4036A	UXT5230AD UXT5236A	UXT5430AD UXT5436A
<b>Colors</b>					
White	•	•	•	•	•
Bisque	•	•	•	•	•
Black	•	•	•	•	•
Stainless Steel	•	•	•	•	•
<b>Controls</b>					
Electronic Touch Controls					•
Slide Controls				•	
Delayed Shutoff					•
Speed Settings	2	2	2	3	3
Halogen Lighting					•
Incandescent Lighting				•	
Lighting Levels	I	I	I	2	2
<b>Ventilation</b>					
Filterless Self-Cleaning, Three-Way Convertible Ventilation				•	•
Vertical Ventilation On 7" Round Duct	•				
Vertical Or Horizontal Ventilation On 3¼" x 10" Duct		•			
Ductless Ventilation With Charcoal Filter			•	Optional*	Optional*
Rating — cfm	190	160	N.A.	300	400

\*Order HRECUXT30 for 30" models and HRECUXT36 for 36" models. Order replacement carbon filter HCFLTUXT36 for models UXT5236 and UXT5436 or replacement carbon filter HCFLTUXT30 for models UXT5230 and UXT5430.


TELESCOPING DOWNDRAFT HOODS

MODELS	HV303	HV363
<b>Colors</b>		
Black	•	•
Optional White Cap	WC303	WC363
<b>Controls</b>		
Electronic Touch Telescoping Operation	•	•
<b>Ventilation</b>		
Washable Grease Filters	2	2
Vertical Or Horizontal Exterior Venting	•	•
Variable-Speed Fan	•	•
Rating — cfm	500	500
Height — in. (cm)	29½ (74.9)	29½ (74.9)
Width — in. (cm)	30 (76.2)	36 (91.4)
Depth — in. (cm)	7 (17.8)	
Approximate Shipping Weight — lbs. (kg)	53 (24)	58 (26)

Kitchen Hood Dimensions — in. (cm)

MODELS	UXT2030A UXT3030A UXT4030A	UXT5230AD UXT5430AD	UXT2036A UXT3036A UXT4036A	UXT5236A UXT5436A
A	12 (30.5)	15¼ (39.7)	12 (30.5)	15¼ (39.7)
B — Width	30 (76.2)	30 (76.2)	36 (91.4)	36 (91.4)
C — Height	6 (15.2)	6 (15.2)	6 (15.2)	6 (15.2)
D — Depth	17½ (44.5)	22¼ (56.5)	17½ (44.5)	22¼ (56.5)
E	5¼ (13.3)	10¼ (26.7)	5¼ (13.3)	10¼ (26.7)
F	2 (5.1)	¾ (2.2)	2 (5.1)	¾ (2.2)
G	9 (22.9)	10¼ (26.0)	9 (22.9)	10¼ (26.0)
H	1¼ (3.8)	1¼ (4.4)	1¼ (3.8)	1¼ (4.4)
I	1 (2.5)	1 (2.5)	1 (2.5)	1 (2.5)
J	7½ (19.1)	7¼ (18.4)	7½ (19.1)	7¼ (18.4)
K	¾ (1.9)	3¼ (8.6)	¾ (1.9)	3¼ (8.6)
L	1¼ (3.8)	11 (27.9)	1¼ (3.8)	11 (27.9)
M	—	10 (25.4)	—	10 (25.4)
N	—	3 (7.6)	—	3 (7.6)
O	—	½ (1.3)	—	½ (1.3)
Approximate Shipping Weight — lbs. (kg)	16 (7)	31 (14)	16 (7)	31 (14)

INSTALLATION INFORMATION

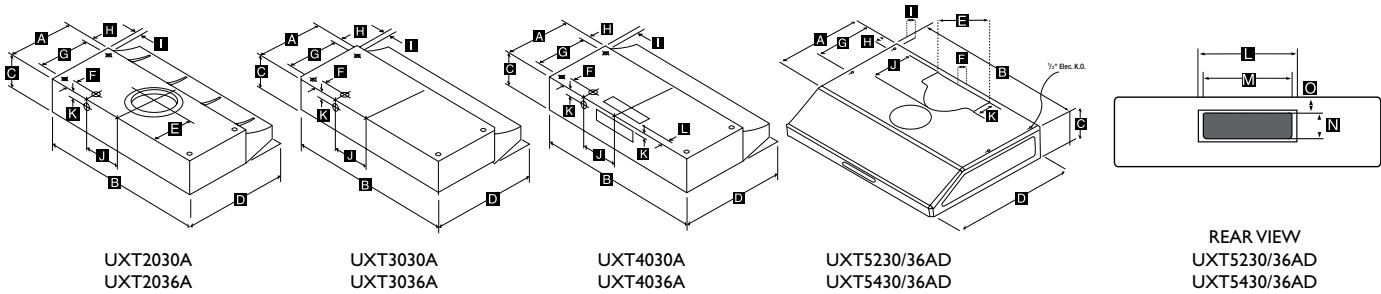


Refer to installation instructions packaged with unit or consult your local Amana representative before making any cutouts or final designs.

All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



AMANA® WASHERS

MODELS	NAV2335	NAV3335	NAV5805	NAV8805
<b>Color</b>				
White	•	•	•	•
<b>Features</b>				
ENERGY STAR®-Qualified 				•
Tub Material	Polymer	Polymer	Elustra™ Stainless Steel	Elustra™ Stainless Steel
Easy-Access™ Opening	•	•	•	•
Motor Speeds	1	2	2	2
Controls	EasySelect	EasySelect	EasySelect	Electronic
Spin Speed — Max. (RPM)	620	620	620	620
Water Levels	4	5	5	Infinite
Agitator	Straight Vane	Deluxe Auger	Deluxe Auger	Tri-Care™
Extra Rinse		•	•	•
Spot-Treating Faucet				•
Bleach Dispenser	•	•	•	•
Fabric Softener Dispenser	•	•	•	•
End-Of-Cycle Signal				On/Off Rocker
SoftSound™ Quiet Package			I	II
Water-Temperature Combinations	4	4	4	4
Automatic Temperature Control				•
Self-Cleaning Lint Filtration System	•	•	•	•
Self-Adjusting Rear Leveling Legs	•	•	•	•
Six-Point Suspension System	•	•	•	•

Wash Cycles

Regular/Cottons	•	•	•	•
Wrinkle-Free/No-Iron Fabrics	•	•	•	•
Handwash	•	•	•	•
Ultra Handwash				•
Quick Wash		•	•	•
Soak Only				•
Whites/Towels				•

Capacities And Unit Dimensions

Tub Capacity — cu. ft.	3.3	3.3	3.3	3.3
Overall Height — in. (cm)	44 (111.8)	44 (111.8)	44 (111.8)	44 (111.8)
Height Of Cabinet — in. (cm)	36 (91.4)	36 (91.4)	36 (91.4)	36 (91.4)
Width — in. (cm)	27 (68.6)	27 (68.6)	27 (68.6)	27 (68.6)
Depth Including Drain Hose — in. (cm)	27 (68.6)	27 (68.6)	27 (68.6)	27 (68.6)
Washer Lid Clearance — in. (cm)	17½ (44.5)	17½ (44.5)	17½ (44.5)	17½ (44.5)
Approximate Shipping Weight — lbs. (kg)	200 (91)	200 (91)	200 (91)	200 (91)

Energy

Electrical Service Requirements	120 VAC, 60 Hz, 15 Amps Max.	120 VAC, 60 Hz, 15 Amps Max.	120 VAC, 60 Hz, 15 Amps Max.	120 VAC, 60 Hz, 15 Amps Max.
Motor Horsepower	½	½	½	½
2006 Energy-Compliant	•	•	•	•


INSTALLATION INFORMATION

Amana® Washers

**HOSE LENGTH:** Inlet: 4 feet (1.22 m); drain: 4 feet (1.22 m).

**INSTALLATION REQUIREMENTS:** Hot and cold water connections with water pressure within 30 – 120 p.s.i. (207 – 827 KPa) range; 120°F to 140°F hot water; a drain; a 120-volt, 60 Hz electrical outlet properly grounded and protected by a 15-amp fuse.

\* Dimensions will vary according to adjustment of leveling legs.

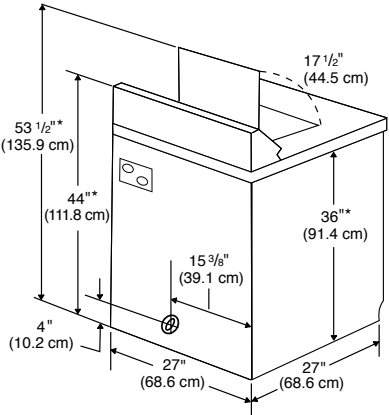

All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.





AMANA® ELECTRIC AND GAS DRYERS

ELECTRIC MODELS	NDE2335	NDE5805	NDE8805
GAS MODELS	NDG2335	NDG5805	NDG8805
<b>Color</b>			
White	•	•	•
<b>Features</b>			
Cylinder Material	TrueCare™ Powder-Coated Steel	TrueCare™ Powder-Coated Steel	Elustra™ Stainless Steel
Temperature Selections	3	4	4
FabriCare™ System	•	•	•
Extended Tumble		Wrinkle Out	
Wrinkle Prevent			•
Drying Rack			•
Drum Light	•	•	•
End-Of-Cycle Signal	On/Off	On/Off	On/Off Chime
SoftSound™ Quiet Package		I	II
Four-Point Suspension System	•	•	•
Reversible Door	•	•	•
Extra-Large Door Opening	•	•	•
<b>Dry Cycles</b>			
Cycle Selections	7	8	16
Dryness Control	Automatic	Automatic	Sensor
Adjustable Degree of Dryness	3 Levels	3 Levels	4 Levels
Fabric Selections	2	2	4
Regular	•	•	•
No-Iron Cycle	•	•	•
Delicates			•
Jeans			•
Refresh		•	•
Touch Up	•		
Time Dry	Up To 100 Minutes	Up To 100 Minutes	Up To 60 Minutes
Damp Dry	•	•	
Air Fluff/No Heat	•	•	•

Optional Accessories — Additional Cost

LP Conversion Kit	LPKI	LPKI	LPKI
-------------------	------	------	------

Capacities And Unit Dimensions

Drum Capacity — cu. ft.	7.1	7.1	7.1
Overall Height — in. (cm)	44 (111.8)	44 (111.8)	44 (111.8)
Height Of Cabinet — in. (cm)	36 (91.4)	36 (91.4)	36 (91.4)
Width — in. (cm)	27 (68.6)	27 (68.6)	27 (68.6)
Depth* — in. (cm)	28½ (72.4)	28½ (72.4)	28½ (72.4)
Dryer Door Clearance — in. (cm)	23¼ (59.1)	23¼ (59.1)	23¼ (59.1)
Approximate Shipping Weight — lbs. (kg)	145 (65.8)	145 (65.8)	145 (65.8)




Energy

Electrical Service Requirements — Electric	240 VAC, 60 Hz, 30 Amps Max.	240 VAC, 60 Hz, 30 Amps Max.	240 VAC, 60 Hz, 30 Amps Max.
Electrical Service Requirements — Gas	120 VAC, 60 Hz, 15 Amps Max.	120 VAC, 60 Hz, 15 Amps Max.	120 VAC, 60 Hz, 15 Amps Max.
Heating Element Wattage @ 240V	5,300	5,300	5,300
Gas Consumption (BTU, Nat. Or LP)	22,000	22,000	22,000
Motor Horsepower	½	½	½

\*Does not include clearance for ductwork venting.

INSTALLATION INFORMATION

Amana® Dryers



All models listed may not be available from every Amana dealer. Amana's ongoing commitment to quality products may mean a change in product specifications without notice.

\* Dimensions will vary according to adjustment of leveling legs.  
\*\*Includes ¾" (1.9 cm) for hinge on back of dryer.




AMANA® DISHWASHERS

MODELS	DDW361RA	ADB1500AW	ADB2500AW	ADB3500AW
<b>Colors</b>				
White	•	•	•	•
Bisque		•	•	
Black	•	•	•	
Stainless Steel	(Kit Optional)	•	•	•
Silver Metallic		•		
ENERGY STAR®-Qualified		•	•	•
<b>Tub</b>				
Size	Normal	Tall	Tall	Tall
Material	Polypropylene	Polypropylene	Polypropylene	Stainless Steel
<b>Cycle Selections</b>				
Heavy Wash	•	•	•	•
Normal Wash	•	•	•	•
Light Wash	•			
Quick Wash		•	•	•
Rinse Only	•		•	•
<b>Features</b>				
Control Buttons	6			
Touch Pads		5	10	10
Status Indicators	2	9	16	16
<b>Wash System</b>				
Wash Levels/Tiers	3/6	5/7	5/7	5/7
Dual Filter		•	•	•
<b>Options</b>				
Auto/Sensor Clean			•	•
High-Temp Wash	•	•	•	•
Sanitize (NSF-Certified)			•	•
One-Touch Memory Cycles		•	•	•
Delay Start	2-/4-/6-Hour	2-/4-/6-Hour	2-/4-/6-Hour	2-/4-/6-Hour
Control Lockout			•	•
Rinse-Aid Dispenser	•	•	•	•
Low Rinse-Aid Indicator		•	•	•
Heated Dry		•	•	•
Vent Dry System	Active	Active	Active	Condensate
<b>Rack Options</b>				
Rack Finish	Vinyl	Vinyl	Nylon	Nylon
Ball-Tip Times	•	•	•	•
Upper Rack				
Deluxe	•		•	•
Cup Shelves			2	2
Lower Rack				
High-Side			•	•
Cup Shelves			2	2
One-Piece Silverware Basket	•			
In-Door Silverware Basket		•	With Covers	With Covers
<b>Sound Options</b>				
SoftSound™ Quiet Package	I	I	II	III
<b>Optional Kits*</b>				
Custom Wood Panel Kit	DAX1000AXX*	N/A	N/A	N/A
Stainless Steel Panel Kit	DAX2000AXS*	N/A	N/A	N/A
<b>Unit Dimensions — in. (cm)</b>				
A — Height**	33½ (85.7)	33½ – 35¼ (85.1 – 89.5)	33½ – 35¼ (85.1 – 89.5)	33½ – 35¼ (85.1 – 89.5)
B — Width	23¾ (60.6)	23¾ (60.6)	23¾ (60.6)	23¾ (60.6)
C — Depth Including Door	27 (68.6)	23¾ (60.6)	23¾ (60.6)	23¾ (60.6)
D — Depth Excluding Door	24 (61)	19½ (49.5)	19½ (49.5)	19½ (49.5)


\* To order custom wood or stainless steel panel kits for DDW361RA, call toll-free 1-800-843-0304.

\*\*For models ADB1500, ADB2500 and ADB3500, height without top trim strip is 33½" (85.1 cm) min., 35¼" (89.5 cm) max.; height with top trim strip is 33¾" (85.7 cm) min., 35½" (89.5 cm) max.

INSTALLATION INFORMATION

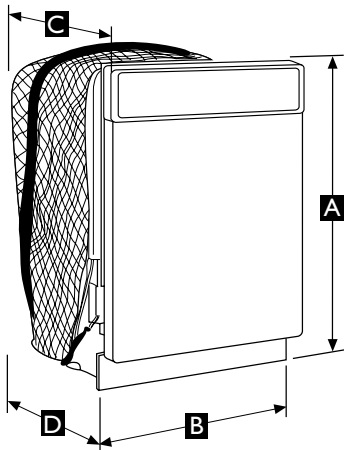

DDW361, ADB1500, ADB2500, ADB3500

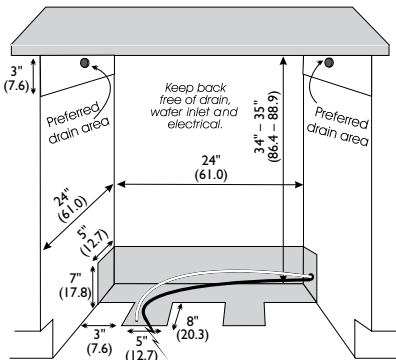

CUTOUT DIMENSIONS — IN. (CM)

Refer to installation instructions packaged with unit or consult your local Amana representative before making any cutouts or final designs.

All models listed may not be available from every Amana dealer.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.



